

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 :

G02B 6/28, G01M 11/00, B24B 19/22

A1

(11) International Publication Number:

WO 00/49439

(43) International Publication Date:

24 August 2000 (24.08.00)

(21) International Application Number:

PCT/GB00/00575

(22) International Filing Date:

17 February 2000 (17.02.00)

(30) Priority Data:

9903789.7

19 February 1999 (19.02.99)

GB

(71) Applicant (for all designated States except US): PROTODEL  
INTERNATIONAL LIMITED [GB/GB]; Binder Hamlyn,  
17 Lansdowne Road, Croydon CR9 2PL (GB).


(72) Inventors; and

(75) Inventors/Applicants (for US only): GILES, Ian, Peter  
[GB/GB]; ProtoDel International Limited, Vulcan House,  
Restmor Way, Hackbridge, Surrey SM6 7AH (GB).  
MONDANOS, Mikalis [GR/GB]; ProtoDel International  
Limited, Vulcan House, Restmor Way, Hackbridge, Surrey  
SM6 7AH (GB). REHMAN, Saeed, Syed [PK/GB];  
ProtoDel International Limited, Vulcan House, Restmor  
Way, Hackbridge, Surrey SM6 7AH (GB).(74) Agents: SARUP, David, Alexander et al.; Raworth Moss &  
Cook, Raworth House, 36 Sydenham Road, Croydon, Surrey  
CR0 2EF (GB).(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG,  
BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE,  
ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP,  
KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,  
MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU,  
SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG,  
US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE,  
LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM,  
AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT,  
BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,  
MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: APPARATUS AND METHOD FOR ABRADING OPTICAL FIBRE

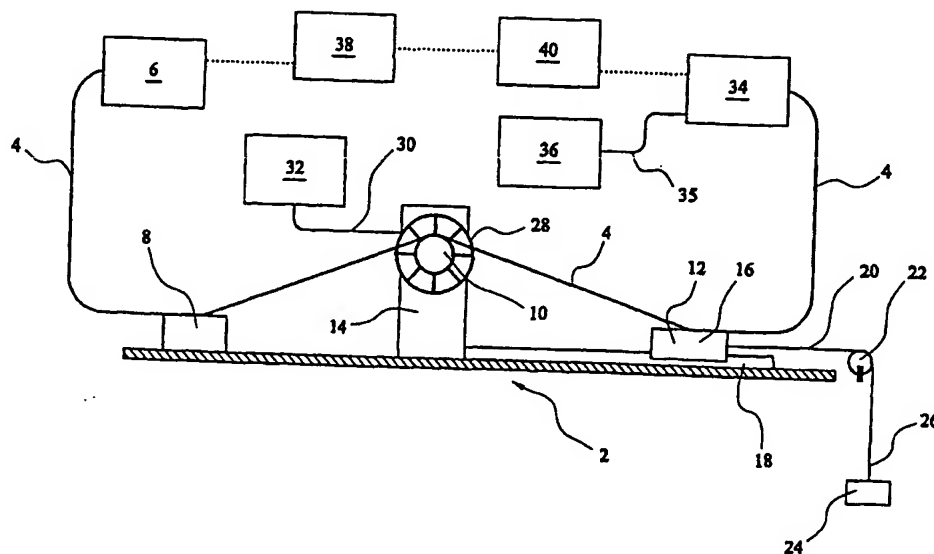

## (57) Abstract

Apparatus for abrading an optical fibre (4) has a wheel (10) or roller having an abrasive surface. There are means (8, 12) for holding an optical fibre against the abrasive surface, a transmitter (6) operative to transmit light into the optical fibre, a receiver (34, 36) operative to detect the light transmitted through a region of the optical fibre to be abraded. In use, the receiver is operative to provide a signal dependent on the level of light received during abrasion.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

- 1 -

## Apparatus and Method for Abrading Optical Fibre

### Technical Field

The present invention relates to, in its various aspects,  
5 an apparatus for abrading an optical fibre, a method of  
abrading an optical fibre, apparatus for determining the  
orientation of a polarisation maintaining optical fibre,  
apparatus for abrading a polarisation maintaining optical  
fibre and a corresponding method, and a method for  
10 determining the orientation of a polarisation maintaining  
optical fibre.

As used in this text, the term light covers other forms of  
electromagnetic radiation; however, infra red and visible  
15 light in particular is contemplated.

### Background

The propagation of an optical signal through an optical  
fibre can be modified in a variety of ways by interacting  
20 with the evanescent field extending into the cladding  
region. Two options are available to access the evanescent  
field:

- (1) reducing the fibre diameter until the evanescent field  
extends beyond the cladding, by perhaps heating and drawing  
25 the fibre, and
- (2) removing the cladding locally by grinding and  
polishing.

Grinding and polishing techniques are known from "Single-  
30 mode fibre optic directional coupler"; R.A. Bergh, G.  
Kotler, H.J. Shaw; Electronic Letts. 1980, Vol. 16 pp260-  
261 involving mounting the optical fibre onto an arc slot  
cut into a glass substrate block. In this technique the  
block is held in a jig and a rotating polishing flat  
35 removes the surface material. Several drawbacks exist with

- 2 -

this known technique, in particular, the necessity to remove large quantities of the glass substrate block, and optimisation of the interfacing epoxies connecting the fibres to the substrate. This known technique is therefore  
5 costly and limited in flexibility for miniaturised component fabrication.

A paper describing seeking to remove material from the fibre alone is "Optical fibre polishing with a motor-driven  
10 polishing wheel"; C.D. Hussey, J.D. Minelly; Electronics Letts. 1988, Vol.24, No.13 pp805-807. This technique involves supporting the fibre over a rotating wheel, and applying grinding paste until the cladding is removed.

There are many variables in this process, such as:

- 15 the diameter of the rotating grinder,
- the tension of the fibre,
- the speed of rotation, and
- the determination of the grinding depths to define the points at which to change the grinding pastes, which would  
20 suggest this would be difficult to implement in practice.

#### Statements of Invention

In a first aspect, the present invention provides apparatus for abrading an optical fibre comprising a wheel or roller  
25 having an abrasive surface, means for holding an optical fibre against the abrasive surface, a transmitter operative to transmit light into the optical fibre, and a receiver operative to detect the light transmitted through a region of the optical fibre to be abraded, in which in use, the  
30 receiver is operative to provide a signal dependent on the level of light received during abrasion.

Preferably, abrasion is stopped when a predetermined level of light received is obtained.

35

- 3 -

Preferably, the optical fibre is clamped on one side and weighted on the other side of its region for abrasion so as to maintain a constant tension in the optical fibre. Preferably the rate of rotation of the wheel or roller is  
5 monitored. Preferably several steps of abrasion are undertaken, each until a predetermined level of light transmitted through the abrasion region is received.

The present invention in its first aspect also relates to a  
10 corresponding method of abrading an optical fibre.

In a second aspect, the present invention provides apparatus for determining the orientation of a polarisation maintaining optical fibre, comprising abutment means to in  
15 use apply a force transverse to the longitudinal axis of the fibre so as to bend the fibre, a transmitter for transmitting light through a region of the fibre to which, in use, the force is applied, a polariser connected to an optical detector, the polariser being rotatable in use so  
20 as to enable detection of maximum and minimum received power levels by the detector, means to rotate the fibre around its longitudinal axis so as to determine an orientation of the fibre giving an at least substantially maximised difference between maximum and minimum detected  
25 power levels corresponding to an axis of polarisation of the fibre.

Preferred embodiments of the present invention in its second aspect have advantages over the approach of aligning  
30 a fibre from one end where mechanical twists destroy alignment and in addition many types of fibres have inherent axis twist resulting from manufacture.

The means to rotate are preferably precision rotation  
35 units.

- 4 -

The abutment means is preferably a removable tube attached to a wheel against which a region of the optical fibre lies.

5

In its second aspect, the present invention also relates to apparatus for abrading a polarisation maintaining optical fibre comprising a wheel or roller having an abrasive surface, means for holding an optical fibre against the  
10 abrasive surface, a transmitter operative to transmit electromagnetic radiation into the optical fibre, and a receiver operative to detect the electromagnetic radiation transmitted through a region of the optical fibre to be  
15 abraded, in which there is also provided abutment means to in use apply a force transverse to the longitudinal axis of the fibre so as to bend the fibre, a polariser connected to the receiver, the polariser being rotatable in use for determination of maximum and minimum transmitted power levels, means to rotate the fibre around its longitudinal  
20 axis so as to set the fibre to an orientation along an axis of polarisation before removing the abutment means and rotatable polariser and abrading by rotating the wheel by determining an orientation of the fibre giving an at least substantially maximised difference between maximum and  
25 minimum received power levels.

The present invention in its second aspect also relates to corresponding methods.

30 Preferably, in use, the receiver is operative to provide a signal dependent on the level of electromagnetic radiation received during abrasion.

Preferably, abrasion is stopped when a predetermined level  
35 of electromagnetic radiation received is obtained.

- 5 -

In its second aspect, the present invention also relates to a method for determining the orientation of a polarisation maintaining optical fibre by applying a force transverse to the fibre axis, transmitting light through the region of the fibre to which the force is applied, and through a polariser, connected to an optical detector, rotating the polariser so as to detect maximum and minimum power levels, rotating the fibre around its longitudinal axis so as to determine an orientation of the fibre giving an at least substantially maximised difference between maximum and minimum detected power levels corresponding to an axis of polarisation of the fibre.

In its third aspect, the present invention relates to a polariser comprising a polarisation maintaining optical fibre which has been controllably abraded to form an abraded region on one side of the fibre in one of its planes of polarisation, the abraded region being at least partially covered with a metal layer.

In its third aspect, the present invention also relates to a corresponding method of making a polariser.

The metal can be a single layer or multiple layers.

#### Detailed Description of the Preferred Embodiments

Preferred embodiments of the present invention in its various aspects will now be described by way of example and with reference to the Figures, in which:

Figure 1 is a schematic diagram illustrating apparatus for optical fibre cladding removal, and

Figure 2 is a schematic diagram illustrating apparatus for optical fibre cladding removal with optical fibre polarisation alignment.

- 6 -

Apparatus for Grinding/Polishing

As shown in Figure 1, the apparatus 2 is for removing locally the cladding to a required depth. The optical fibre 4 is attached to the optical transmitter 6 to launch  
5 light into it. The wavelength of the transmitter is selected to ensure that the optical fibre 4 transmits with a single mode and has generally the desired operational wavelength of a component being manufactured. The fibre 4 is held by a first clamp 8 so as to be suspended over a  
10 polishing wheel 10 and supported by a second clamp 12 which is a sliding clamp located on the opposite side of the polishing wheel 10 to the fixed clamp 8. The first clamp 8 is fixed and the second clamp 12 consists of a sliding stage 16 supported on a rail 8, free to move toward or away  
15 from the wheel 10. The sliding stage 16 is attached to chain 20 which passes over a pulley 22. A weight 24 is attached to the opposite end 26 of the chain 20. By this method a constant strain is applied to the fibre 4 which is selectable by changing the weight 24. The wheel 10 has a  
20 support column 14 and the height of the wheel 10 is adjustable to alter the surface contact of the fibre 4 with the wheel 10. Wheels of different diameters are usable to vary the length of its contact surface with the fibre 4. The wheel 10 is made of glass to support the grinding and  
25 polishing medium, but in alternative embodiments can be made of other materials. Apparatus for monitoring the wheel rotation speed is incorporated, in this embodiment a segmented disc 28 is used which rotates at the same rate as the wheel 10 and intercepts an infra red beam (not shown)  
30 thereby giving a pulsed signal 30 proportional to the rotation rate. The signal is fed to a frequency counter or tachometer 32.

The light transmitted by the fibre 4 is input to an optical  
35 detector 34 which provides a voltage output signal 35 to a



- 7 -

voltmeter 36 proportional to the level of optical power reaching the detector.

5 In the preferred embodiment, a modulator 38 is provided connected to both the optical transmitter 6 and a lock-in amplifier 40. The optical detector 34 is also connected to the lock-in amplifier 40. This allows more sensitive detection of the level of optical power transmitted through the fibre 4 than in a similar but alternative embodiment  
10 (not shown) in which modulator 38 and lock-in amplifier are omitted.

#### Method of Grinding/Polishing

Using the preferred apparatus described above, the  
15 preferred method for removing locally the cladding of the optical fibre 4 consists of a single grinding stage and two polishing stages during which throughput optical signal levels are monitored. The steps undertaken are as follows:

20 The fibre 4 is placed over the wheel 10 and clamped into the clamps 8, 12 and tensioned by applying the required weight 24 to the chain 20 attached to the sliding stage 16.

25 The central section of the fibre 4 is marked.

The fibre 4 is removed from the wheel 10 and its outer acrylate coating stripped at the mid position of the marked section by the required amount. The fibre 4 is then cleaned with a solvent such as isopropyl alcohol.  
30

The speed of the wheel 10 is set to a pre-defined rate.

35

- 8 -

Grinding paper or paste is attached to the wheel 10 and the fibre 4 placed on the wheel 10. A few drops of high refractive index oil are placed on the fibre 4 covering the section to be ground.

5

The fibre 4 is ground while monitoring the transmission signal level using voltmeter 36. The grinding process is stopped when the transmitted power has dropped by the required level. The high refractive index oil reduces the transmission of light through the ground region of the fibre 4 in proportion to the level of evanescent field intercepted, i.e. distance from the core.

10

15 The fibre 4 is removed from the wheel 10 and the wheel 10 is cleaned with isopropyl alcohol.

The ground section of the fibre 4 is also cleaned with isopropyl alcohol.

20

A lens polishing cloth (not shown) is placed on to the wheel 10 with a water solution of cerium oxide.

25

The fibre 4 is placed back on the wheel 10 and polished for a period of time, during which the throughput signal level is monitored. Once the transmitted power has reached the required level, the process is stopped.

30

The fibre 4 is removed and the polished section cleaned.

35

The process is repeated with a finer polishing particle size until the final device quality is achieved.

- 9 -

Of course, additional grinding and polishing stages can be undertaken to modify the where appropriate properties of the locally decladded optical fibre 4.

5

Alignment of Polarisation Maintaining Fibres for Grinding/Polishing

Polarisation maintaining fibres have preferential axes defined by inducing a high birefringence during fabrication. To produce a useful component by decladding a region of such a fibre requires that the precise positions of the axes are determined in the abrasion region. In other words the fibre must be aligned at the point of grinding.

The apparatus for doing this is shown in Figure 2. This apparatus is basically as shown in Figure 1. In addition two precision rotation units 42, 42 of known type are attached between the wheel 10 and the respective clamp 8, 12. In an alternative embodiment (not shown) a single precision rotation unit is used at one end only.

The fibre 4 is held in the units 42,42 such that additional birefringence is not introduced to the fibre 4 through pressure. Both rotation units 42,42 are adjusted in the same direction, thereby rotating the orientation of the fibre 4 birefringent axes relative to the surface of the wheel 10. The fibre 4 is suspended over the wheel 10 which is not rotating but to which a small diameter tube 44 is attached, so as to lie on the wheel 10 rim and with an axis

parallel to the central axis of the wheel 10. The fibre is bent over the tube 44. A weight 24 is applied to the sliding stage 16 to provide sufficient strain to the fibre

- 10 -

4. A constant force is applied to the fibre 4 on the tube 44, by applying a known weight 24 for example. The force of the tube on the side of the fibre 4 locally modifies the birefringence of the optical fibre 4.

5

Light of a wavelength such that the fibre 4 propagates a single mode in both polarisation states, is linearly polarised and transmitted through the fibre 4 such that the polarisation aligns with one of the fibre 4 axes. The light remains polarised on the single axis through the full length of fibre 4, when the fibre 4 is unperturbed by external effects. Applying the force to the side of the optical fibre 4 as described above causes light to couple to the orthogonal polarisation mode (other axis) dependent upon the magnitude of the force and the direction relative to the fibre axes. A force supplied along either axis does not couple any light whereas a force applied at 45 deg to the axes couples a maximum level of light. Between these two extremes, the level of light varies with the angle. Therefore, by detecting the level of light in the orthogonal polarisation mode at the output of the fibre the angle of the force applied to the axes is determined.

The level of light in each polarisation mode is determined by transmitting a low coherence light signal into the fibre 4. An edge emitting light emitting diode (E.L.E.D.) or superluminescent laser diode (S.L.D.) or similar device provides the low coherence light signal. The properties of the optical fibre 4 are such that the polarisation modes have different propagation constants and create a relative time delay between the propagating light in each polarisation mode. Providing the time delay is greater than the coherence time of the source then the output polarisations will no longer have a phase relationship and will add in power rather than amplitude. The output from

- 11 -

the fibre is passed through a polariser (not shown) of known type and the power level recorded by an optical detector 34. By rotating the polariser the maximum and minimum power levels are detected. When the difference  
5 between the maximum and minimum power levels is greatest the fibre 4 is aligned such that the force is applied along an axis. When the difference is zero, the force is at 45 degrees.

10 The fibre 4 is asymmetric and investigating the relative levels of power either side of the maximum difference allows the determination of the particular fast or slow axis along which the fibre 4 is aligned.

15 The fibre is then rotated using the rotation units until the level of coupled light is zero, at which point the fibre is clamped firmly at each end, the tube 44 is removed and the grinding procedure as described above followed involving rotating the wheel 10.

20

#### Aligned Polarisation maintaining Fibre Polariser

By maximising the difference in power level as the fibre is aligned on an axis (either its fast or its slow axis) and then after removal of the tube ground and polished to the  
25 required finish. Thereafter, by placing a metal layer (not shown) onto the fibre 4 a high attenuation is achieved in one polarisation mode and a very low attenuation in the orthogonal mode, thereby creating a polariser. A single or multi-metal layer such as aluminium, nickel etc. can be  
30 applied through standard processes such as evaporation to a depth greater than the skin depth for the optical

lightwave, such that the metal thickness is effectively infinite to the propagating wave of light.

- 12 -

CLAIMS:

1. Apparatus for abrading an optical fibre (4) comprising a wheel (10) or roller having an abrasive surface, means  
5 (8, 12) for holding an optical fibre against the abrasive surface, a transmitter (6) operative to transmit light into the optical fibre, and a receiver (34, 36) operative to detect the light transmitted through a region of the optical fibre to be abraded, in which in use, the receiver  
10 is operative to provide a signal dependent on the level of light received during abrasion.
2. Apparatus according to claim 1 comprising means to  
15 stop the abrasion when a predetermined level of light received is obtained.
3. Apparatus according to claim 1 or claim 2, in which the means for holding is operative such that the optical fibre is clamped on one side and weighted on the other side  
20 of its region for abrasion so as to maintain a constant tension in the optical fibre.
4. Apparatus according to any preceding claim, in which in use the rate of rotation of the wheel (10) or roller is  
25 monitored.
5. Apparatus according to any preceding claim, in which in use several steps of abrasion are undertaken, each until a predetermined level of light transmitted through the  
30 abrasion region is detected.
6. A method of abrading an optical fibre (4) using a wheel (10) or roller having an abrasive surface comprising holding the optical fibre against the abrasive surface,  
35 transmitting light into the optical fibre, detecting the

- 13 -

light transmitted through a region of the optical fibre to be abraded to provide a signal dependent on the level of light detected during abrasion.

5 7. A method of abrading an optical fibre according to claim 6 in which abrasion is stopped when a predetermined level of light received is obtained.

8. Apparatus for determining the orientation of a  
10 polarisation maintaining optical fibre, comprising abutment means (44) to in use apply a force transverse to the longitudinal axis of the fibre so as to bend the fibre, a transmitter (6) for transmitting light through a region of the fibre to which, in use, the force is applied, a  
15 polariser connected to an optical detector (34), the polariser being rotatable in use so as to enable detection of maximum and minimum received power levels by the detector, means (42, 42) to rotate the fibre around its longitudinal axis so as to determine an orientation of the  
20 fibre giving an at least substantially maximised difference between maximum and minimum detected power levels corresponding to an axis of polarisation of the fibre.

9. Apparatus according to claim 8, in which the means  
25 (42, 42) to rotate are precision rotation units.

10. Apparatus according to claim 8 or 9, in which the abutment means is a removable tube (44) attached to a wheel (10) against which a region of the optical fibre lies.

30

11. A method for determining the orientation of a polarisation maintaining optical fibre (4) by applying a force transverse to the fibre axis, transmitting light through the region of the fibre to which the force is  
35 applied, and through a polariser, connected to an optical

- 14 -

detector (34), rotating the polariser so as to detect maximum and minimum power levels, rotating the fibre around its longitudinal axis so as to determine an orientation of the fibre giving an at least substantially maximised difference between maximum and minimum detected power levels corresponding to an axis of polarisation of the fibre.

12. Apparatus for abrading a polarisation maintaining optical fibre comprising a wheel (10) or roller having an abrasive surface, means (8, 12) for holding an optical fibre against the abrasive surface, a transmitter (6) operative to transmit electromagnetic radiation into the optical fibre, and a receiver (34, 36) operative to detect the electromagnetic radiation transmitted through a region of the optical fibre to be abraded, in which there is also provided abutment means (44) to in use apply a force transverse to the longitudinal axis of the fibre so as to bend the fibre, a polariser connected to the receiver, the polariser being rotatable in use for determination of maximum and minimum transmitted power levels, means (42, 42) to rotate the fibre around its longitudinal axis so as to set the fibre to an orientation along an axis of polarisation before removing the abutment means and rotatable polariser and abrading by rotating the wheel (10) by determining an orientation of the fibre giving an at least substantially maximised difference between maximum and minimum received power levels.

13. Apparatus according to claim 12, in which in use, the receiver (34, 36) is operative to provide a signal (35) dependent on the level of electromagnetic radiation received during abrasion.

14. Apparatus according to claim 12 or claim 13, in which



- 15 -

in use abrasion is stopped when a predetermined level of electromagnetic radiation received is obtained.

15. A method of abrading a polarisation maintaining  
5 optical fibre using a wheel (10) or roller having an  
abrasive surface, by holding the optical fibre against the  
abrasive surface, using a transmitter (6) to transmit  
electromagnetic radiation into the optical fibre, and a  
10 receiver (34, 36) to detect the electromagnetic radiation  
transmitted through a region of the optical fibre to be  
abraded, providing abutment means (44) to in use apply a  
force transverse to the longitudinal axis of the fibre so  
as to bend the fibre, providing a polariser connected to  
15 the receiver, rotating the polariser to determine maximum  
and minimum transmitted power levels, rotating the fibre  
around its longitudinal axis so as to set the fibre to an  
orientation along an axis of polarisation before removing  
the abutment means (44) and rotatable polariser, and  
20 abrading by rotating the wheel (10) by determining an  
orientation of the fibre giving an at least substantially  
maximised difference between maximum and minimum received  
power levels.


16. A polariser comprising a polarisation maintaining  
25 optical fibre which has been controllably abraded to form  
an abraded region on one side of the fibre in one of its  
planes of polarisation, the abraded region being at least  
partially covered with a metal layer.

30 17. A polariser according to claim 16, in which the metal  
layer is a single layer.

18. A polariser according to claim 16, in which the metal  
layer comprises a plurality of layers.

- 16 -

19. A method of making a polariser by controllably abrading a polarisation maintaining optical fibre to form an abraded region on one side of the fibre in one of its planes of polarisation, and at least partially covering the
- 5 abraded region with a metal layer.

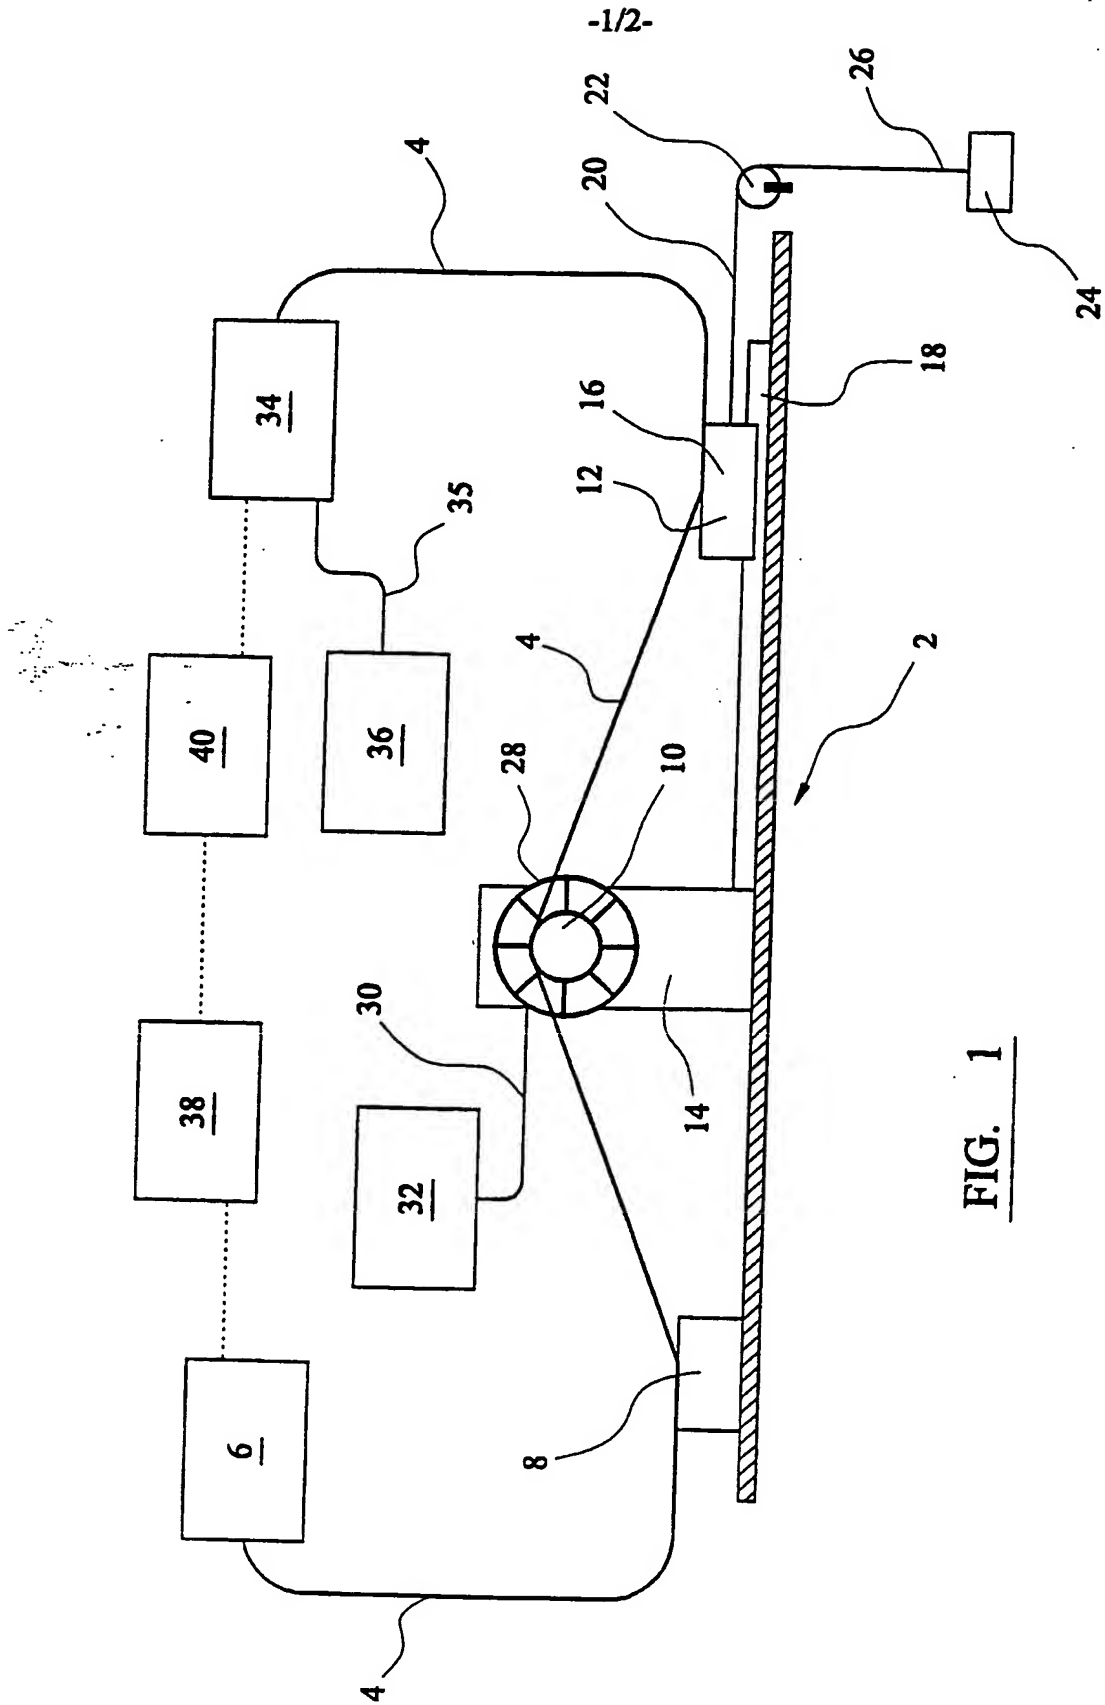

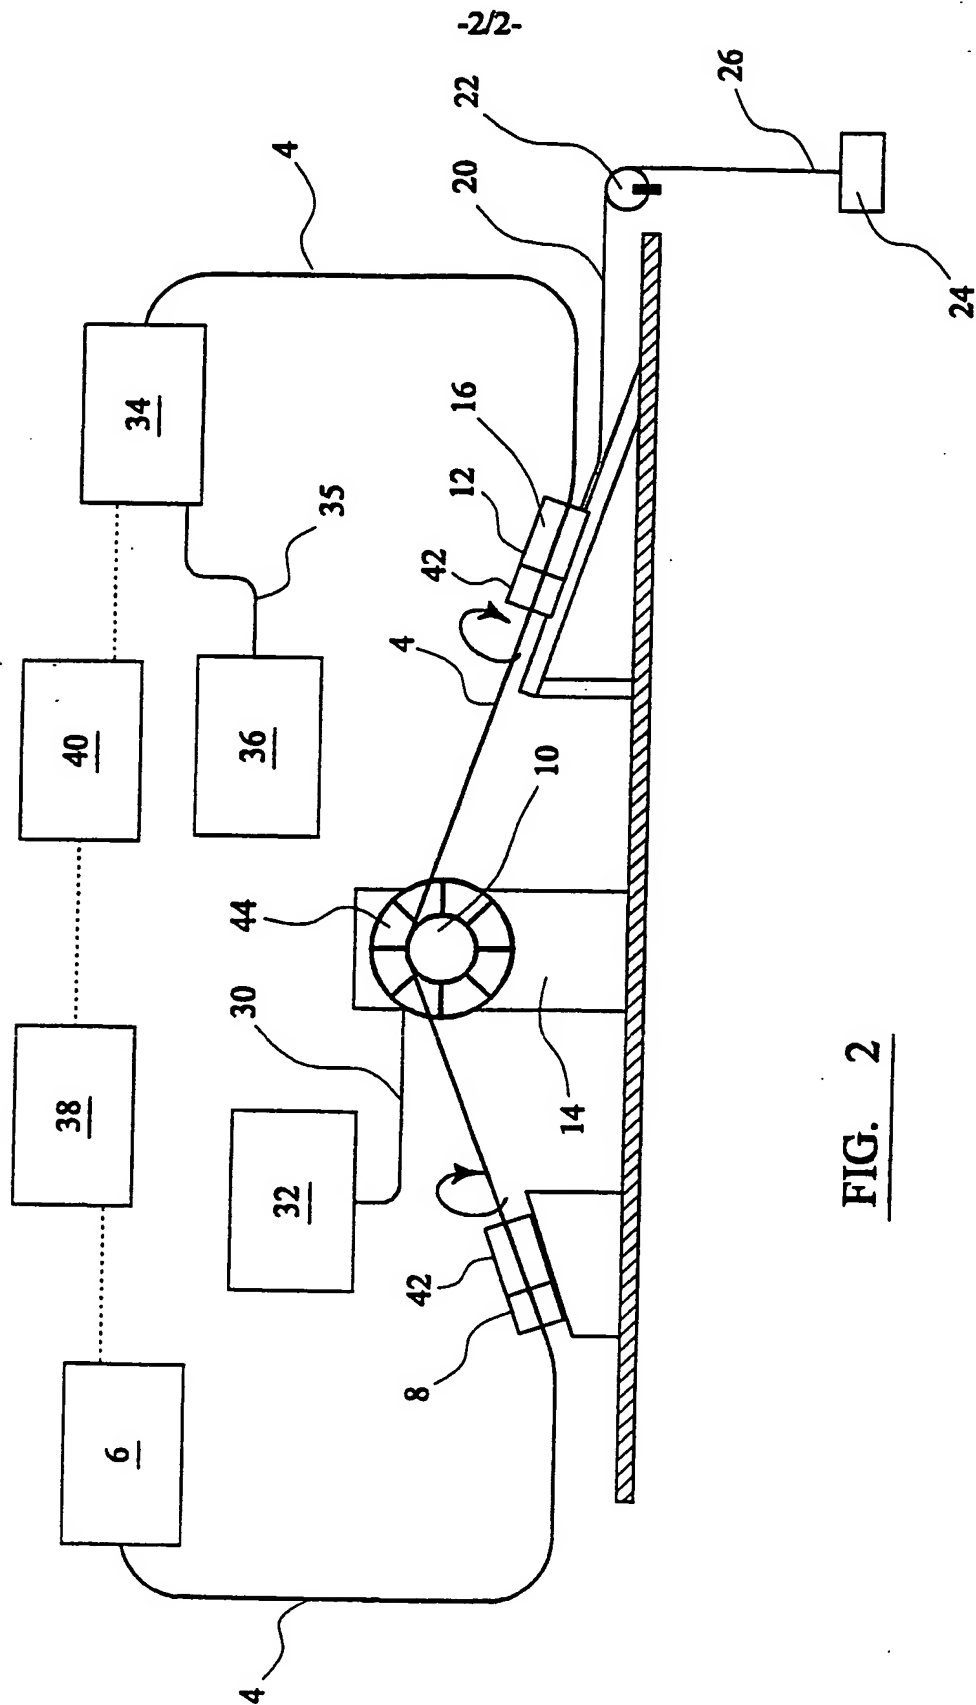


FIG. 2

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/00575

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02B6/28 G01M11/00 B24B19/22

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02B B29B G01M B24B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	"OPTICAL FIBRE POLISHING WITH A MOTOR-DRIVEN POLISHING WHEEL" ELECTRONICS LETTERS, GB, IEE STEVENAGE, vol. 24, no. 13, 23 June 1988 (1988-06-23), pages 805-807, XP000030130 ISSN: 0013-5194 cited in the application	1, 2, 5-7
Y	the whole document	3, 4, 12-15, 19
X	PATENT ABSTRACTS OF JAPAN vol. 010, no. 060 (P-435), 11 March 1986 (1986-03-11) & JP 60 203904 A (HITACHI DENSEN KK), 15 October 1985 (1985-10-15) abstract	1, 2, 5-7
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

11 May 2000

Date of mailing of the international search report

24/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Luck, W

# INTERNATIONAL SEARCH REPORT

Inte. .onal Application No

PCT/GB 00/00575

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CORDARO M H ET AL: "PRECISION FABRICATION OF D-SHAPED SINGLE-MODE OPTICAL FIBERS BY IN SITU MONITORING" JOURNAL OF LIGHTWAVE TECHNOLOGY,US,IEEE. NEW YORK, vol. 12, no. 9, 1 September 1994 (1994-09-01), pages 1524-1531, XP000484331 ISSN: 0733-8724 chapter III B	1,2,5-7
X	EP 0 229 456 A (LITTON SYSTEMS INC) 22 July 1987 (1987-07-22) column 12, line 36 - line 40	1,2,5-7
X	US 5 106 394 A (BRAMSON MICHAEL) 21 April 1992 (1992-04-21) abstract figures 2-5	1,2,5-7
Y	BROPHY T J ET AL: "FORMATION AND MEASUREMENT OF TAPERS IN OPTICAL FIBERS" REVIEW OF SCIENTIFIC INSTRUMENTS,US,AMERICAN INSTITUTE OF PHYSICS. NEW YORK, vol. 64, no. 9, 1 September 1993 (1993-09-01), pages 2650-2654, XP000395647 ISSN: 0034-6748 chapter III figure 2	3,4
A	PATENT ABSTRACTS OF JAPAN vol. 018, no. 396 (M-1644), 25 July 1994 (1994-07-25) & JP 06 114713 A (SUMITOMO CEMENT CO LTD), 26 April 1994 (1994-04-26) abstract	1
A	US 5 623 567 A (BARBERIO YVONNE L ET AL) 22 April 1997 (1997-04-22) column 6, line 55 -column 7, line 9	5
X	S.L.A CARRARA ET. AL.: "Elasto-optic alignment of birefringent axes in polarization-holding optical fibers" OPTICS LETTERS, vol. 11, no. 7, July 1986 (1986-07), pages 470-472, XP000885176 New York, USA	8,9,11
Y	the whole document	12-15
	-/-	

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/00575

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	TODD D A ET AL: "POLARIZATION-SPLITTING POLISHED FIBER OPTIC COUPLERS" OPTICAL ENGINEERING, US, SOC. OF PHOTO-OPTICAL INSTRUMENTATION ENGINEERS. BELLINGHAM, vol. 32, no. 9, 1 September 1993 (1993-09-01), pages 2077-2081, XP000396823 ISSN: 0091-3286	16-19
Y	chapter 3	19
X	US 4 712 866 A (DYOTT RICHARD B) 15 December 1987 (1987-12-15) column 3, line 37 -column 4, line 48 figure 2	16-18
X	WO 89 01171 A (UNIV LONDON) 9 February 1989 (1989-02-09) claims 1,2 figure 2	16,18
X	US 5 781 675 A (CHEN KUN-FA ET AL) 14 July 1998 (1998-07-14) claim 1 figure 5	16,18
A	R.A. BERGH ET AL.: "SINGLE-MODE FIBRE OPTIC DIRECTIONAL COUPLER" ELECTRONICS LETTERS, vol. 16, no. 7, 27 March 1980 (1980-03-27), pages 260-261, XP000885173 cited in the application	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/00575

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 60203904 A	15-10-1985	NONE	
EP 0229456 A	22-07-1987	US 4738511 A AT 91799 T AU 567012 B AU 6186186 A DE 3688733 A DE 3688733 T JP 62160406 A KR 9007557 B NO 870042 A	19-04-1988 15-08-1993 05-11-1987 09-07-1987 26-08-1993 13-01-1994 16-07-1987 15-10-1990 08-07-1987
US 5106394 A	21-04-1992	US 5136818 A	11-08-1992
JP 06114713 A	26-04-1994	NONE	
US 5623567 A	22-04-1997	JP 8234043 A	13-09-1996
US 4712866 A	15-12-1987	AU 594487 B AU 7608587 A CA 1293397 A DE 3776017 A EP 0254462 A JP 2076012 C JP 7082134 B JP 63047708 A	08-03-1990 28-01-1988 24-12-1991 27-02-1992 27-01-1988 25-07-1996 06-09-1995 29-02-1988
WO 8901171 A	09-02-1989	NONE	
US 5781675 A	14-07-1998	NONE	